

1214 PROTRACTOR

Cutting Applications for Glass, Silicon, Crystals, Ceramic, & Carbide




The Protractor's V-track rail system offers smooth and precise table motion and lasting durability.

Features:

- Precision Protractor Saw Table
- Remote Coolant Reservoir
- Adjustable Blade Guard
- Ultra-Precision V-Track Saw Table Guide Rail System
- Vertically Adjustable Saw Head
- Greaseable Spindle Bearings
- 10-14 Inch Diameter Blade Capacity
- Coolant Powered Cleanup Gun
- 3 Position Expandable Saw Table
- Coolant Retaining Splash Guards
- Adjustable Coolant Flow Valve
- Super Tough Power Coat Paint Finish
- 2 HP Thermally Protected Motor
- Adjustable Work Stop

GLASSMASTER
FABRICATIONS


1200 Kenyon Road, Ontario, New York 14519 USA
(315) 524-8826 • Fax (315) 524-4778
www.glassmasterfab.com

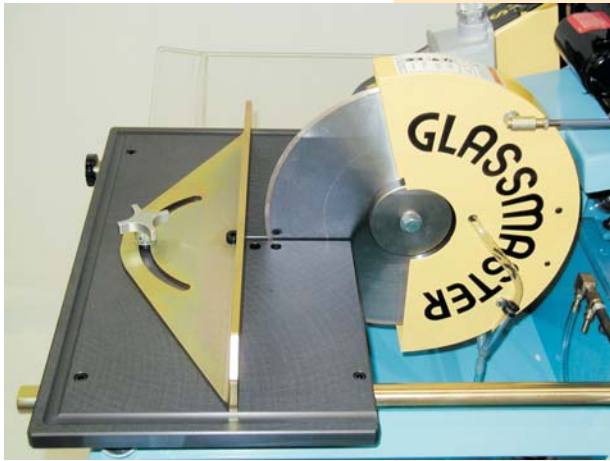

The Protractor's adjustable blade guard allows additional clearance for cutting large material, maximizes coolant containment and offers optimum operator safety.


Protractor Specifications:

- Height 52 in.
- Length 48 in.
- Width 36 in.
- 50 in. With splash guards
- Maximum depth of cut: 5 in.
- Cutting Capacity: 10 in.
- Protractor Rotation: 120°
- Blade diameter: 10-14 in.
- Maximum blade width: .125 in.
- Blade perpendicularity to table
5 minuets total
- Coolant system: remote reservoir
- Motor type: 2 hp thermally protected
- Motor voltage: 115/230 volts AC

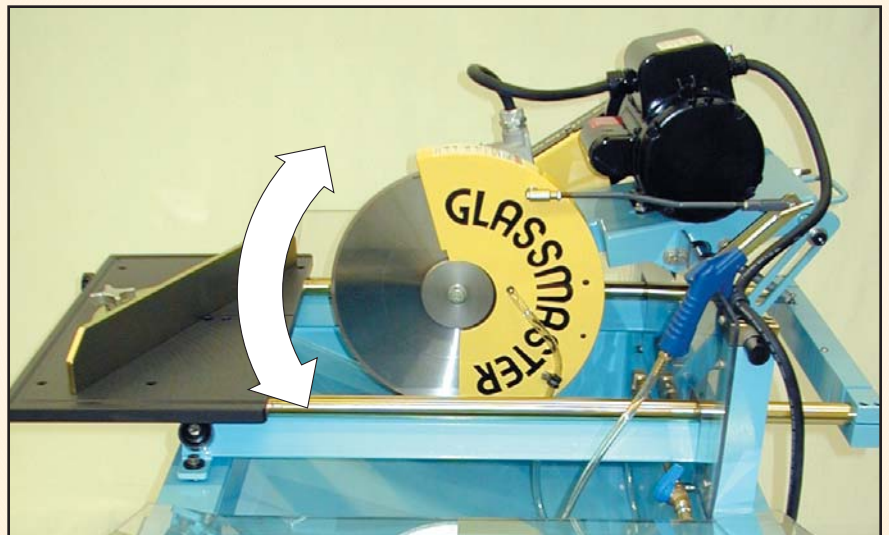

Vertically adjusting the saw head raises the cutting blade's center line allowing material up to 10 x 10 inches to be cut.

The Protractor's V-track rail system offers smooth and precise table motion and lasting durability.

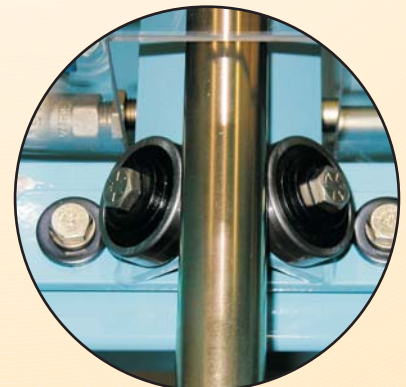

1200 Kenyon Road, Ontario, New York 14519 USA
 (315) 524-8826 • Fax (315) 524-4778
www.glassmasterfab.com